

A superior topcoated thermal label facestock specifically engineered for pharmacy prescription vial labels where exceptional image durability is required against household chemicals and the environment.

LABEL FACESTOCK



Key Features

- Topcoated product durability
- Exceptional chemical resistance against hand sanitizers and household cleaners
- Exceptional resistance to heat, light and moisture
- Crisp legible images with or without over-varnishes
- Compatible with UV flexographic inks
- Print speeds up to 8-ips

Applications

- Pharmacy prescription vial labels

Use of Appvion's thermal products in processing, equipment, end-use of other applications for which they were not intended voids all warranties.

Appvion has transitioned to the Techkon densitometer, from the Gretag densitometer, on December 3, 2019.



Publication Date: November 2019 © 2019 Appvion Operations, Inc. Data is for reference only. May be subject to alterations.

PRODUCT CHARACTERISTICS

Caliper (mils/μm)	3.20 ± 0.30/84 ± 8
Basis Weight	
17 x 22-500 (lbs)	21.0 ± 1.1
g/m ²	78.9 ± 4.0

Thermal Response - Nominal	
Static (°C ± 5°)	
0.2 ODU	93.3
1.0 ODU	107.8
Maximum Density (ODU)	2.1
Temperature Required	149
Dynamic -Atlantek 400 (mJ/mm ²)	
0.2 ODU	6.5
1.0 ODU	9.8
Maximum Density (ODU)	2.1
Energy Required	16.0

Brightness (UV Excluded)	>82
Gurley Stiffness Nominal (mg)	MD 90 CD 40
Elmendorf Tear Nominal (g)	MD 43 CD 44
Tensile (lbs/in)	MD 32 CD 16
Parker Print Surf	<1.00

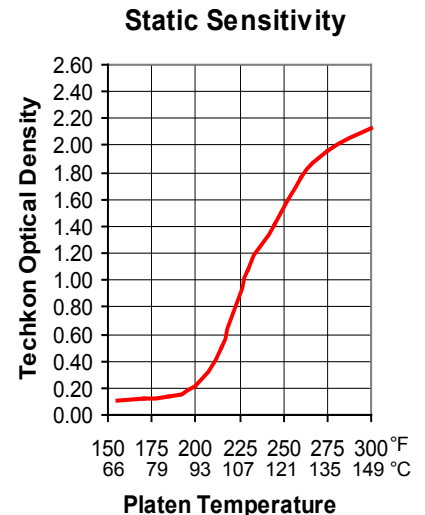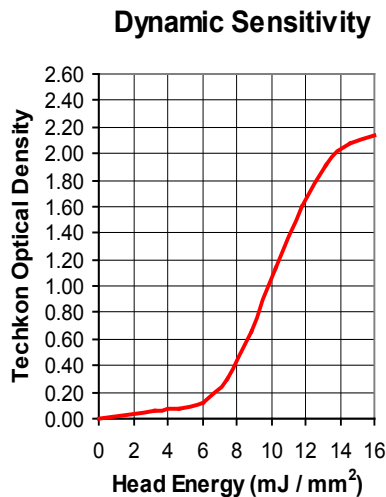

APPVION